


# FHP V-Belt



- Designed for light duty, fractional horsepower drives.
- Capable of handling drives with backside idler.
- External wrapping provides a smooth and quiet operation with minimum vibration.
- Heat and oil resistant, static conductive.

## Cross-Sectional Dimensions

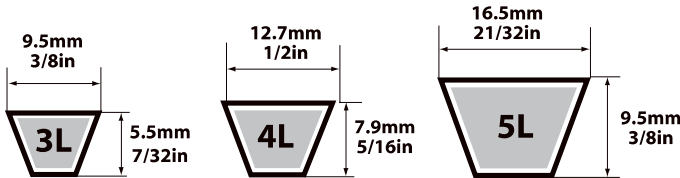

## Product Code

**4L - 380**

Cross Section ———— Belt Code, 38.0 inches

3L				4L				5L			
Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)	Belt No.	Outside Length (Inch)
3L 110	11.0	3L 710	71.0	4L 150	15.0	4L 750	75.0	5L 230	23.0	5L 830	83.0
3L 120	12.0	3L 720	72.0	4L 160	16.0	4L 760	76.0	5L 240	24.0	5L 840	84.0
3L 130	13.0	3L 730	73.0	4L 170	17.0	4L 770	77.0	5L 250	25.0	5L 850	85.0
3L 140	14.0	3L 740	74.0	4L 180	18.0	4L 780	78.0	5L 260	26.0	5L 860	86.0
3L 150	15.0	3L 750	75.0	4L 190	19.0	4L 790	79.0	5L 270	27.0	5L 870	87.0
3L 160	16.0	3L 760	76.0	4L 200	20.0	4L 800	80.0	5L 280	28.0	5L 880	88.0
3L 170	17.0	3L 770	77.0	4L 210	21.0	4L 810	81.0	5L 290	29.0	5L 890	89.0
3L 180	18.0			4L 220	22.0	4L 820	82.0	5L 300	30.0	5L 900	90.0
3L 190	19.0			4L 230	23.0	4L 830	83.0	5L 310	31.0	5L 910	91.0
3L 200	20.0			4L 240	24.0	4L 840	84.0	5L 320	32.0	5L 920	92.0
3L 210	21.0			4L 250	25.0	4L 850	85.0	5L 330	33.0	5L 930	93.0
3L 220	22.0			4L 260	26.0	4L 860	86.0	5L 340	34.0	5L 940	94.0
3L 230	23.0			4L 270	27.0	4L 870	87.0	5L 350	35.0	5L 950	95.0
3L 240	24.0			4L 280	28.0	4L 880	88.0	5L 360	36.0	5L 960	96.0
3L 250	25.0			4L 290	29.0	4L 890	89.0	5L 370	37.0	5L 970	97.0
3L 260	26.0			4L 300	30.0	4L 900	90.0	5L 380	38.0	5L 980	98.0
3L 270	27.0			4L 310	31.0	4L 910	91.0	5L 390	39.0	5L 990	99.0
3L 280	28.0			4L 320	32.0	4L 920	92.0	5L 400	40.0	5L 1000	100.0
3L 290	29.0			4L 330	33.0	4L 930	93.0	5L 410	41.0	5L 1010	101.0
3L 300	30.0			4L 340	34.0	4L 940	94.0	5L 420	42.0	5L 1020	102.0
3L 310	31.0			4L 350	35.0	4L 950	95.0	5L 430	43.0	5L 1030	103.0
3L 320	32.0			4L 360	36.0	4L 960	96.0	5L 440	44.0	5L 1040	104.0
3L 330	33.0			4L 370	37.0	4L 970	97.0	5L 450	45.0	5L 1050	105.0
3L 340	34.0			4L 380	38.0	4L 980	98.0	5L 460	46.0	5L 1060	106.0
3L 350	35.0			4L 390	39.0	4L 990	99.0	5L 470	47.0	5L 1070	107.0
3L 360	36.0			4L 400	40.0	4L 1000	100.0	5L 480	48.0	5L 1080	108.0
3L 370	37.0			4L 410	41.0	4L 1010	101.0	5L 490	49.0	5L 1090	109.0
3L 380	38.0			4L 420	42.0	4L 1020	102.0	5L 500	50.0	5L 1100	110.0
3L 390	39.0			4L 430	43.0	4L 1030	103.0	5L 510	51.0	5L 1110	111.0
3L 400	40.0			4L 440	44.0	4L 1040	104.0	5L 520	52.0	5L 1120	112.0
3L 410	41.0			4L 450	45.0	4L 1050	105.0	5L 530	53.0	5L 1130	113.0
3L 420	42.0			4L 460	46.0	4L 1060	106.0	5L 540	54.0	5L 1140	114.0
3L 430	43.0			4L 470	47.0	4L 1070	107.0	5L 550	55.0	5L 1150	115.0
3L 440	44.0			4L 480	48.0	4L 1080	108.0	5L 560	56.0	5L 1160	116.0
3L 450	45.0			4L 490	49.0	4L 1090	109.0	5L 570	57.0	5L 1170	117.0
3L 460	46.0			4L 500	50.0	4L 1100	110.0	5L 580	58.0	5L 1180	118.0
3L 470	47.0			4L 510	51.0	4L 1110	111.0	5L 590	59.0	5L 1190	119.0
3L 480	48.0			4L 520	52.0	4L 1120	112.0	5L 600	60.0	5L 1200	120.0
3L 490	49.0			4L 530	53.0	4L 1130	113.0	5L 610	61.0		
3L 500	50.0			4L 540	54.0	4L 1140	114.0	5L 620	62.0		
3L 510	51.0			4L 550	55.0	4L 1150	115.0	5L 630	63.0		
3L 520	52.0			4L 560	56.0	4L 1160	116.0	5L 640	64.0		
3L 530	53.0			4L 570	57.0	4L 1170	117.0	5L 650	65.0		
3L 540	54.0			4L 580	58.0	4L 1180	118.0	5L 660	66.0		
3L 550	55.0			4L 590	59.0	4L 1190	119.0	5L 670	67.0		
3L 560	56.0			4L 600	60.0	4L 1200	120.0	5L 680	68.0		
3L 570	57.0			4L 610	61.0			5L 690	69.0		
3L 580	58.0			4L 620	62.0			5L 700	70.0		
3L 590	59.0			4L 630	63.0			5L 710	71.0		
3L 600	60.0			4L 640	64.0			5L 720	72.0		
3L 610	61.0			4L 650	65.0			5L 730	73.0		
3L 620	62.0			4L 660	66.0			5L 740	74.0		
3L 630	63.0			4L 670	67.0			5L 750	75.0		
3L 640	64.0			4L 680	68.0			5L 760	76.0		
3L 650	65.0			4L 690	69.0			5L 770	77.0		
3L 660	66.0			4L 700	70.0			5L 780	78.0		
3L 670	67.0			4L 710	71.0			5L 790	79.0		
3L 680	68.0			4L 720	72.0			5L 800	80.0		
3L 690	69.0			4L 730	73.0			5L 810	81.0		
3L 700	70.0			4L 740	74.0			5L 820	82.0		