


Multi MAXSTAR WEDGE SUPREME

All the quality features and benefits of single belts - Plus.

- Designed for tough applications where multiple drive belts are subject to heavy shock and pulsating loads.
- Banding prevents belt whip, belt turnover, vibration and jumping off that may occur with single belts in multiple drive applications.
- Lateral rigidity keeps the belt running in a straight line as it enters the pulley grooves during strong pulsating or shock loads for reduced wear.
- Frictional and wedging principles of the V-Belt drive apply and prevent slip at low tension and low bearing loads.

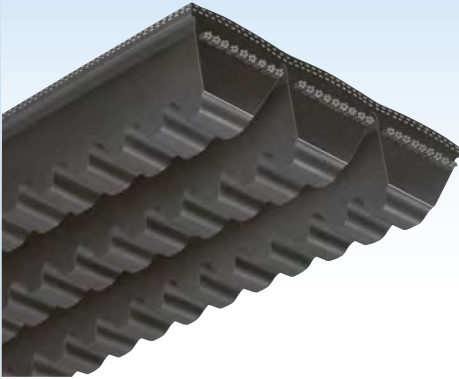

Cross-Sectional Dimensions

Product Code

4R - 5V - X - 1320

4 Ribs

Cross Section

Rawedge Cogged Construction

Belt Code, 132.0 inches

3VX			
Belt No.	Effective Length (Inch)	Belt No.	Effective Length (Inch)
2R3VX375	37.5	2R3VX600	60.0
3R3VX375	37.5	3R3VX600	60.0
4R3VX375	37.5	4R3VX600	60.0
5R3VX375	37.5	5R3VX600	60.0
2R3VX400	40.0	2R3VX630	63.0
3R3VX400	40.0	3R3VX630	63.0
4R3VX400	40.0	4R3VX630	63.0
5R3VX400	40.0	5R3VX630	63.0
2R3VX425	42.5	2R3VX670	67.0
3R3VX425	42.5	3R3VX670	67.0
4R3VX425	42.5	4R3VX670	67.0
5R3VX425	42.5	5R3VX670	67.0
2R3VX450	45.0	2R3VX710	71.0
3R3VX450	45.0	3R3VX710	71.0
4R3VX450	45.0	4R3VX710	71.0
5R3VX450	45.0	5R3VX710	71.0
2R3VX475	47.5	2R3VX750	75.0
3R3VX475	47.5	3R3VX750	75.0
4R3VX475	47.5	4R3VX750	75.0
5R3VX475	47.5	5R3VX750	75.0
2R3VX490	49.0	2R3VX800	80.0
3R3VX490	49.0	3R3VX800	80.0
4R3VX490	49.0	4R3VX800	80.0
5R3VX490	49.0	5R3VX800	80.0
2R3VX500	50.0	2R3VX850	85.0
3R3VX500	50.0	3R3VX850	85.0
4R3VX500	50.0	4R3VX850	85.0
5R3VX500	50.0	5R3VX850	85.0
2R3VX530	53.0	2R3VX900	90.0
3R3VX530	53.0	3R3VX900	90.0
4R3VX530	53.0	4R3VX900	90.0
5R3VX530	53.0	5R3VX900	90.0
2R3VX560	56.0	2R3VX950	95.0
3R3VX560	56.0	3R3VX950	95.0
4R3VX560	56.0	4R3VX950	95.0
5R3VX560	56.0	5R3VX950	95.0

5VX					
Belt No.	Effective Length (Inch)	Belt No.	Effective Length (Inch)	Belt No.	Effective Length (Inch)
2R5VX500	50.0	2R5VX1000	100.0	2R5VX1700	170.0
3R5VX500	50.0	3R5VX1000	100.0	3R5VX1700	170.0
4R5VX500	50.0	4R5VX1000	100.0	4R5VX1700	170.0
5R5VX500	50.0	5R5VX1000	100.0	5R5VX1700	170.0
2R5VX530	53.0	2R5VX1060	106.0	2R5VX1800	180.0
3R5VX530	53.0	3R5VX1060	106.0	3R5VX1800	180.0
4R5VX530	53.0	4R5VX1060	106.0	4R5VX1800	180.0
5R5VX530	53.0	5R5VX1060	106.0	5R5VX1800	180.0
2R5VX560	56.0	2R5VX1120	112.0	2R5VX1900	190.0
3R5VX560	56.0	3R5VX1120	112.0	3R5VX1900	190.0
4R5VX560	56.0	4R5VX1120	112.0	4R5VX1900	190.0
5R5VX560	56.0	5R5VX1120	112.0	5R5VX1900	190.0
2R5VX600	60.0	2R5VX1180	118.0	2R5VX2000	200.0
3R5VX600	60.0	3R5VX1180	118.0	3R5VX2000	200.0
4R5VX600	60.0	4R5VX1180	118.0	4R5VX2000	200.0
5R5VX600	60.0	5R5VX1180	118.0	5R5VX2000	200.0
2R5VX630	63.0	2R5VX1250	125.0		
3R5VX630	63.0	3R5VX1250	125.0		
4R5VX630	63.0	4R5VX1250	125.0		
5R5VX630	63.0	5R5VX1250	125.0		
2R5VX670	67.0	2R5VX1320	132.0		
3R5VX670	67.0	3R5VX1320	132.0		
4R5VX670	67.0	4R5VX1320	132.0		
5R5VX670	67.0	5R5VX1320	132.0		
2R5VX710	71.0	2R5VX1400	140.0		
3R5VX710	71.0	3R5VX1400	140.0		
4R5VX710	71.0	4R5VX1400	140.0		
5R5VX710	71.0	5R5VX1400	140.0		
2R5VX750	75.0	2R5VX1500	150.0		
3R5VX750	75.0	3R5VX1500	150.0		
4R5VX750	75.0	4R5VX1500	150.0		
5R5VX750	75.0	5R5VX1500	150.0		
2R5VX800	80.0				
3R5VX800	80.0				
4R5VX800	80.0				
5R5VX800	80.0				
2R5VX850	85.0				
3R5VX850	85.0				
4R5VX850	85.0				
5R5VX850	85.0				
2R5VX900	90.0				
3R5VX900	90.0				
4R5VX900	90.0				
5R5VX900	90.0				
2R5VX950	95.0				
3R5VX950	95.0				
4R5VX950	95.0				
5R5VX950	95.0				