



# Perforated V-Rope

Perforated V-Rope is characterized by spaced perforations to accommodate splicing.

- It uses a metal fastener (ordered separately) to create a specific length for your individual application.
- With a high-strength multi-fiber fabric that has a high resistance to oil, heat, and abrasion, Quick-Set Perforated V-Rope provides long durability and corrosion-resistance.
- These belts are recommended for temporary use when the existing V-belt must be replaced urgently.

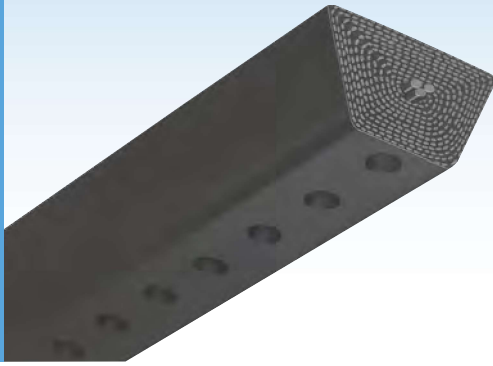

Section	M	A	B	C
Belt width b (in)	0.39	0.50	0.66	0.88
Belt height h (in)	0.22	0.31	0.41	0.53
Belt angle (°)	40	40	40	40
Length per roll (ft.)	328	328	328	328
Hole diameter (in)	0.08	0.10	0.12	0.16
Hole pitch (in)	0.20	0.31	0.35	0.43



Product Code	Roll Length (ft)	Fastener Code	Fasteners per package
QM-3/8	328	QMF	10
QA-1/2	328	QAF	10
QB-21/32	328	QBF	10
QC-7/8	328	QCF	10